



US008477070B2

(12) **United States Patent**
Pettus et al.

(10) **Patent No.:** **US 8,477,070 B2**
(45) **Date of Patent:** ***Jul. 2, 2013**

(54) **INTEGRATED ANTENNA AND CHIP
PACKAGE AND METHOD OF
MANUFACTURING THEREOF**

(75) Inventors: **Michael Gregory Pettus**, Laguna
Niguel, CA (US); **James Robert Amos
Bardeen**, Los Angeles, CA (US)

(73) Assignee: **Vubiq, Inc.**, Aliso Viejo, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **12/849,713**

(22) Filed: **Aug. 3, 2010**

(65) **Prior Publication Data**

US 2011/0181484 A1 Jul. 28, 2011

Related U.S. Application Data

(63) Continuation of application No. 12/070,281, filed on
Feb. 15, 2008, now Pat. No. 7,768,457.

(60) Provisional application No. 60/936,951, filed on Jun.
22, 2007.

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.**
USPC **343/700 MS**; 343/872; 343/873

(58) **Field of Classification Search**
USPC 343/700 MS, 872, 909, 873
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,684,952 A	8/1987	Munson
4,752,680 A	6/1988	Larsson
5,103,210 A	4/1992	Rode
5,218,189 A	6/1993	Hutchison

(Continued)

FOREIGN PATENT DOCUMENTS

DE	4127892 A1	2/1993
DE	102004045707	3/2006

(Continued)

OTHER PUBLICATIONS

Abele, P. et al., "Wafer Level Integration of a 24 GHz Differential SiGe-MMIC Oscillator with a Patch Antenna using BCB as a Dielectric Layer," Dept. Of Electron Devices and Circuits, University of Ulm, 2003.

Agarwal, B et al. "A Transferred-Substrate HBT Wide-Band Differential Amplifier to 50 GHz," IEEE Microwave and Guided Wave Letters, vol. 8, No. 7, Jul. 1998.

Aoki, S. et al., "A Flip Chip Bonding Technology Using Gold Pillars for Millimeter-Wave Applications," IEEE MIT-S Digest, 1997.

Boustedt, K., "GHz Flip Chip—An Overview," Ericsson Microwave Systems AB, Core Unit Research Center Microwave and High Speed Electronics, 2004.

Brauner, T., "A Differential Active Patch Antenna Element for Array Applications," IEEE Microwave and Wireless Components Letters, vol. 13, No. 4, Apr. 2003.

Deal, W. et al., "Integrated-Antenna Push-Pull Power Amplifiers," IEEE Transactions on Microwave Theory and Techniques, vol. 47, No. 8, Aug. 1999.

(Continued)


Primary Examiner — Hoang V Nguyen

(74) *Attorney, Agent, or Firm* — LeClairRyan

(57) **ABSTRACT**

An integrated antenna and chip package and method of manufacturing thereof. The package includes a first substrate having a first surface and a second surface. The second surface is configured to interface the chip package to a circuit board. A second substrate of the package is disposed on the first surface of the first substrate and is made of a dielectric material. One or more antennas are disposed on the second substrate and a communication device is coupled to the antenna, wherein the communication device is disposed on the second substrate in substantially the same plane as the antenna. A lid is coupled to the first substrate and is configured to encapsulate the antenna and the communication device. The lid has a lens that is configured to allow radiation from the antenna to be emitted therethrough and a shoulder configured to transfer heat produced from the communication device.

15 Claims, 12 Drawing Sheets

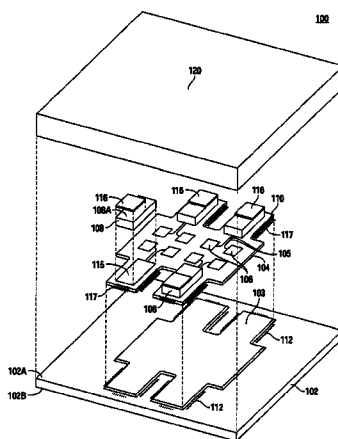

U.S. PATENT DOCUMENTS

5,276,345	A *	1/1994	Siegel et al.	257/352
5,347,287	A	9/1994	Speciale	
5,479,400	A	12/1995	Dilworth	
5,486,830	A	1/1996	Axline	
5,726,630	A	3/1998	Marsh	
5,754,948	A	5/1998	Metze	
5,767,802	A	6/1998	Kosowsky	
5,784,543	A	7/1998	Marchand	
5,864,061	A	1/1999	Dilz, Jr.	
5,903,239	A	5/1999	Takahashi	
5,960,029	A	9/1999	Kim	
6,027,027	A	2/2000	Smithgall	
6,028,560	A	2/2000	Pfizenmaier	
6,037,894	A	3/2000	Pfizenmaier	
6,236,366	B1	5/2001	Yamamoto	
6,366,245	B1	4/2002	Schmidt	
6,424,315	B1	7/2002	Glenn	
6,476,756	B2	11/2002	Landt	
6,509,836	B1	1/2003	Ingram	
6,542,083	B1	4/2003	Richley	
6,545,646	B2	4/2003	Marchand	
6,547,140	B2	4/2003	Marchand	
6,600,428	B1	7/2003	O'Toole	
6,696,879	B1	2/2004	O'Toole	
6,721,289	B1	4/2004	O'Toole	
6,735,183	B2	5/2004	O'Toole	
6,836,472	B2	12/2004	O'Toole	
6,867,983	B2	3/2005	Liu	
6,874,639	B2	4/2005	Lawandy	
6,891,391	B2	5/2005	Hiroki	
6,972,714	B1	12/2005	Baharav	
7,289,065	B2 *	10/2007	Prieto- Burgos et al.	343/700 MS
7,295,161	B2 *	11/2007	Gaucher et al.	343/700 MS
RE40,253	E	4/2008	Kim	
7,372,408	B2 *	5/2008	Gaucher et al.	343/700 MS
RE40,385	E	6/2008	Bang	
7,443,906	B1	10/2008	Bang et al.	
2002/0140557	A1	10/2002	Dukler	
2003/0137446	A1	7/2003	Vavik	
2004/0159708	A1	8/2004	Yogev	
2004/0211840	A1	10/2004	Yogev	
2004/0217171	A1	11/2004	deVos	
2006/0109176	A1	5/2006	Lee	
2007/0103380	A1 *	5/2007	Weste	343/907

FOREIGN PATENT DOCUMENTS

EP	0766410	5/2000
EP	0884799	8/2000
EP	1 357 395 A1 *	10/2003
EP	1357395	10/2003

JP	2006279199	12/2006
KR	20060010867 A1	10/2007
WO	0065691	11/2000
WO	2004004083	6/2002
WO	2006007002	6/2004

OTHER PUBLICATIONS

- Gilleo, K., "Chip Scale or Flip Scale-the Wrong Question?", Cookson Electronics, 1998.
- Hang, C. et al., "High-Efficiency Push-Pull Power Amplifier Integrated with Quasi-Yagi Antenna," IEEE Transactions on Microwave Theory and Techniques, vol. 49, No. 6, Jun. 2001.
- Jentzsch, a., "Theory and Measurements of Flip-Chip Interconnects for Frequencies up to 100 GHz," IEEE Transactions on Microwave Theory and Techniques, vol. 49, No. 5, May 2001.
- Karnfelt, C. et al., "Flip Chip Assembly of a 40-60 GHz GaAs Microstrip Amplifier," 12th Gaas® Symposium—Amsterdam, 2004.
- Katayama, Y. et al., "Wireless Data Center Networking with Steered-Beam mmWave Links," IEEE WCNC 2011—Service and Application, Published 2011.
- Rowe, D., "Bouncing Data Would Speed Up Data Centers," MIT Published Article, <http://www.technologyreview.com/communications/39367/?ref=rss>, Dec. 20, 2011.
- Owano, N., "Bouncing Signals Off Ceiling Can Rev Up Data Centers," PhysOrg.com, Published Dec. 20, 2011.
- Pfeiffer, U., et al., "A 60GHz Radio Chipset Fully-Integrated in a Low-Cost Packaging Technology," 2006 Electronic Components and Technology Conference, 2006.
- Pfeiffer, U., et al., "A Chip-Scale Packaging Technology for 60-GHz Wireless Chip Sets," IEEE Transactions on Microwave Theory and Techniques, vol. 54, No. 8, Aug. 2006.
- Pfeiffer, U., et al., "Equivalent Circuit Model Extraction of Flip-Chip Ball Interconnects Based on Direct Probing Techniques," IEEE Microwave and Wireless Components Letters, vol. 15, No. 9, Sep. 2005.
- Pfeiffer, U., "Low-loss Contact Pad with Thned Impedance for Operation at Millimeter Wave Frequencies," IEEE SPI 2005, Published 2005.
- Schrank, H., "Analysis of the Radiation Resistance and Gain of a Full-Wave Dipole," IEEE Antennas and Propagation Magazine, vol. 36, No. 5, Oct. 1994.
- Staiculescu, D. et al., "Flip Chip v. Wire Bond," Printed Circuit Design, Published Jun. 2012.
- Viallon, C., "Microwave Differential Structures Optimization: Application to a Double Balanced SiGe Active Down-Converter Design," RFIT2005—IEEE International Workshop on Radio-Frequency Integration Technology, Nov. 2005.

* cited by examiner

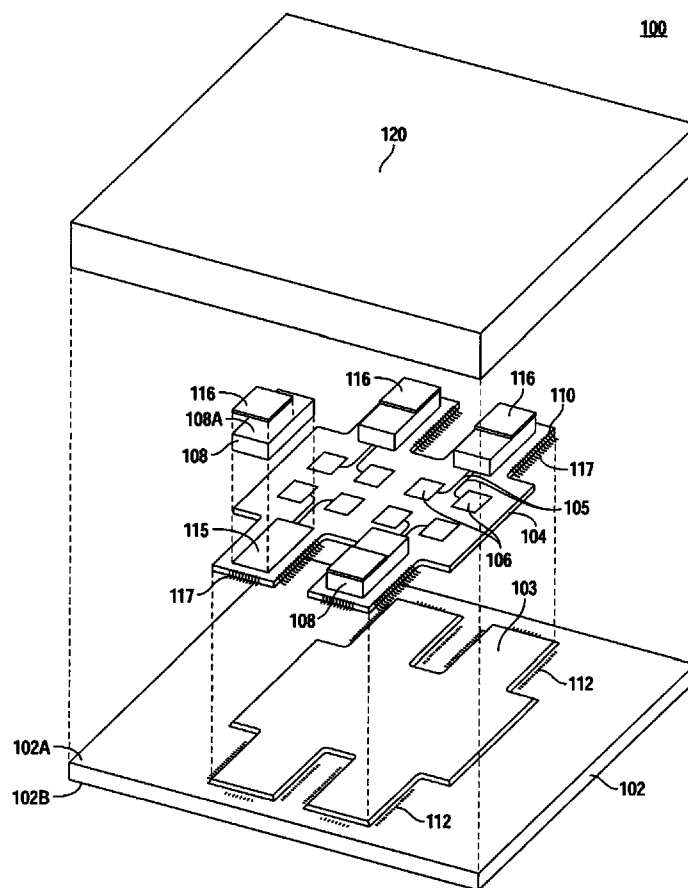


FIG. 1A

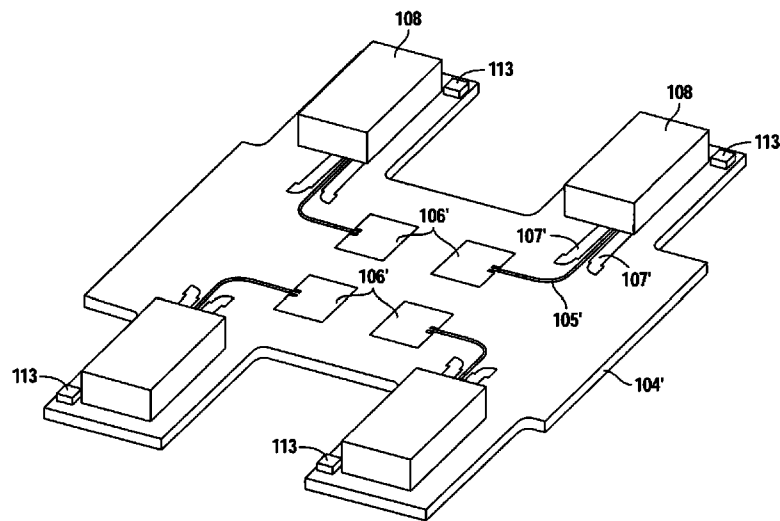


FIG. 1B

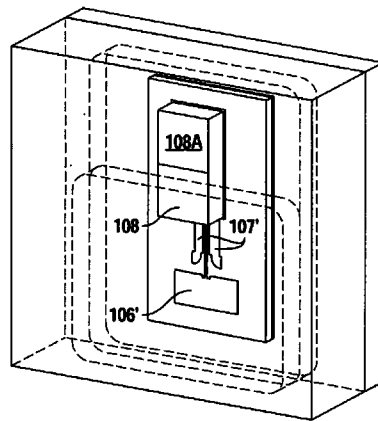


FIG. 1C

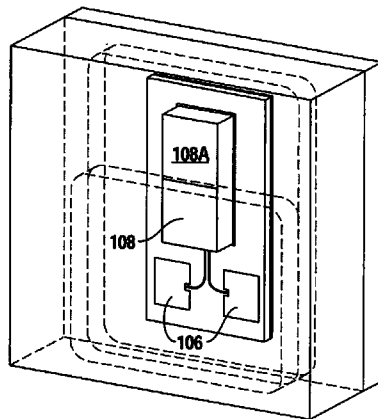


FIG. 1D

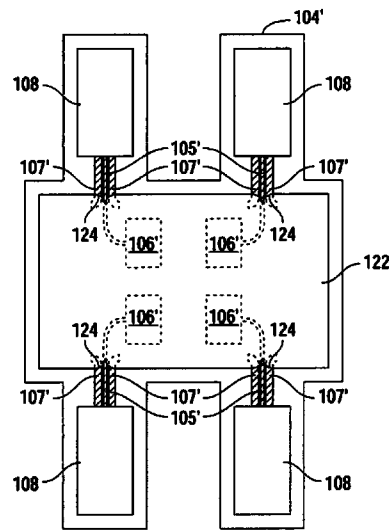


FIG. 1E

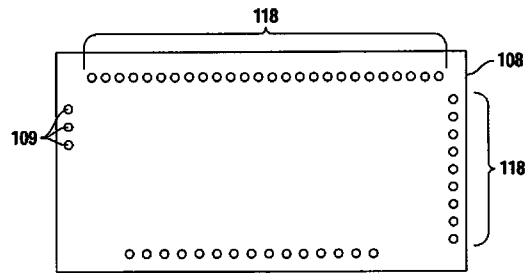


FIG. 2

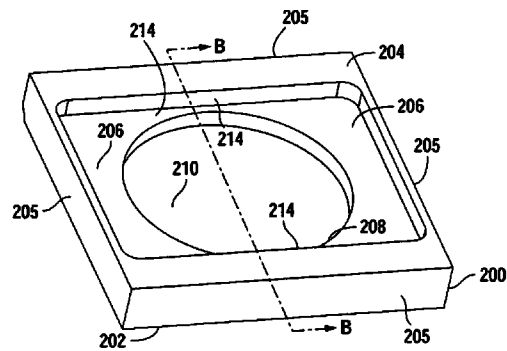


FIG. 3A

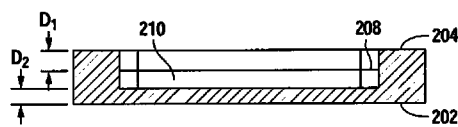


FIG. 3B




FIG. 3C




FIG. 3D

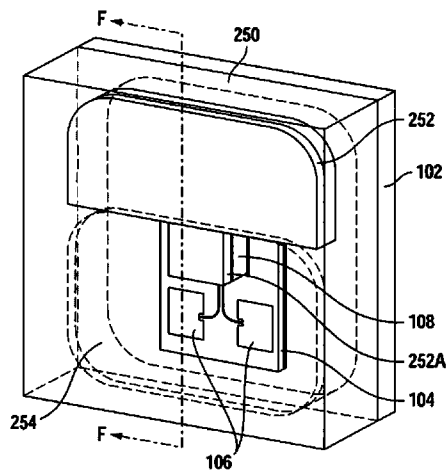


FIG. 3E

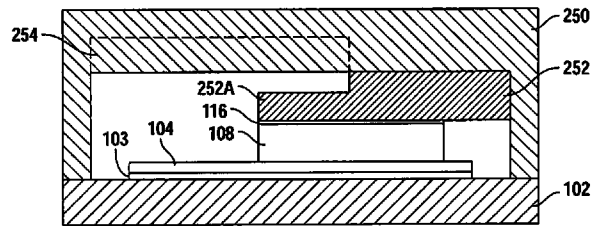


FIG. 3F

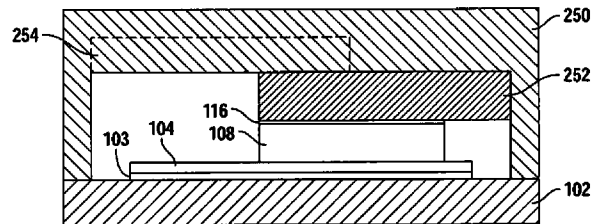


FIG. 3G

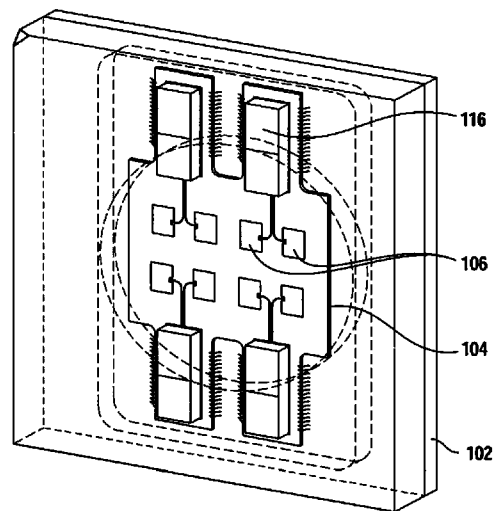


FIG. 4

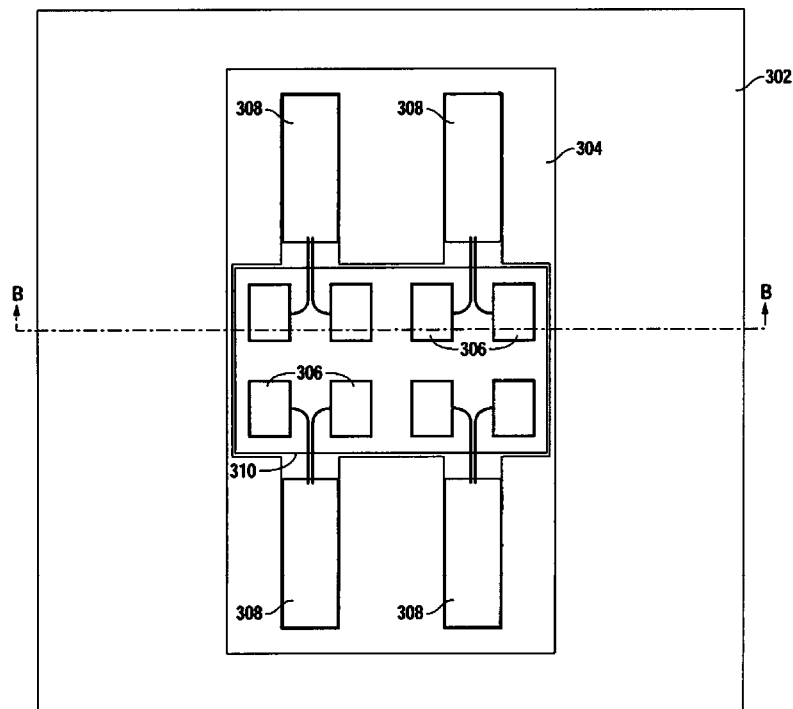


FIG. 5A

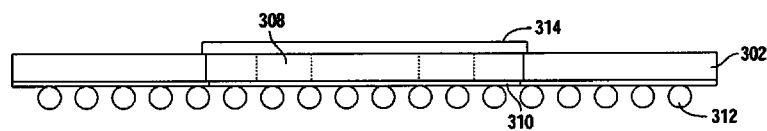


FIG. 5B

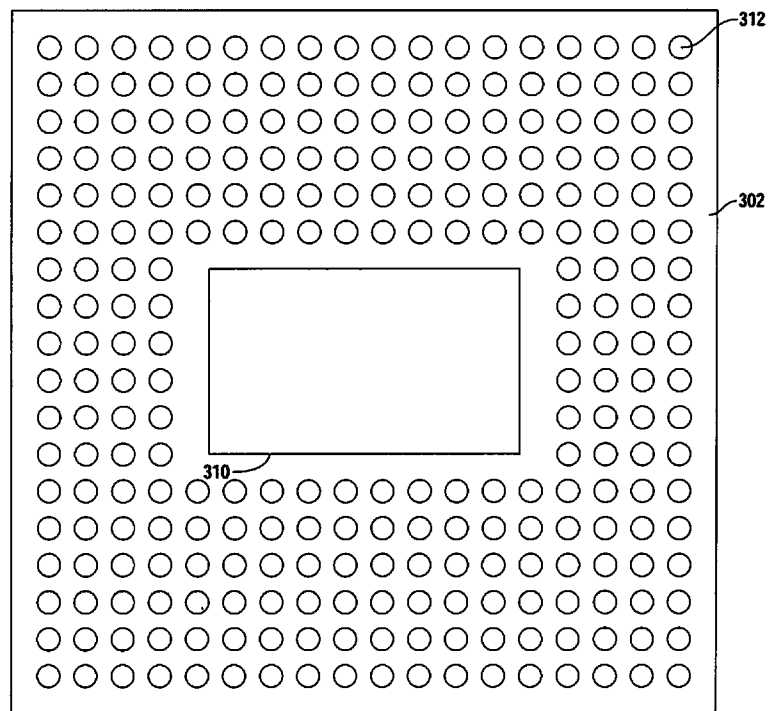


FIG. 5C

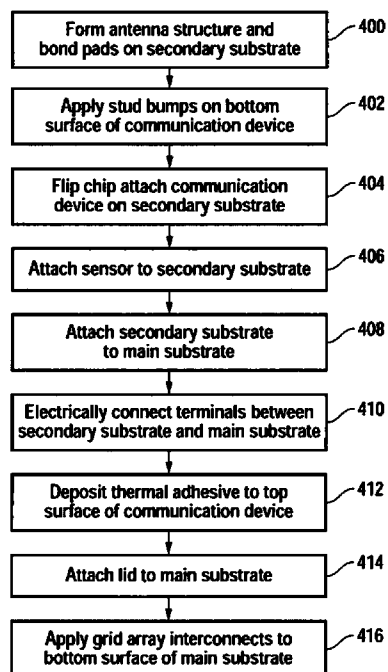


FIG. 6

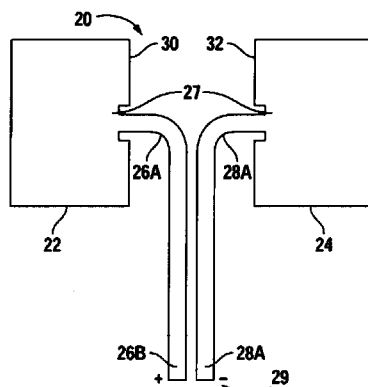
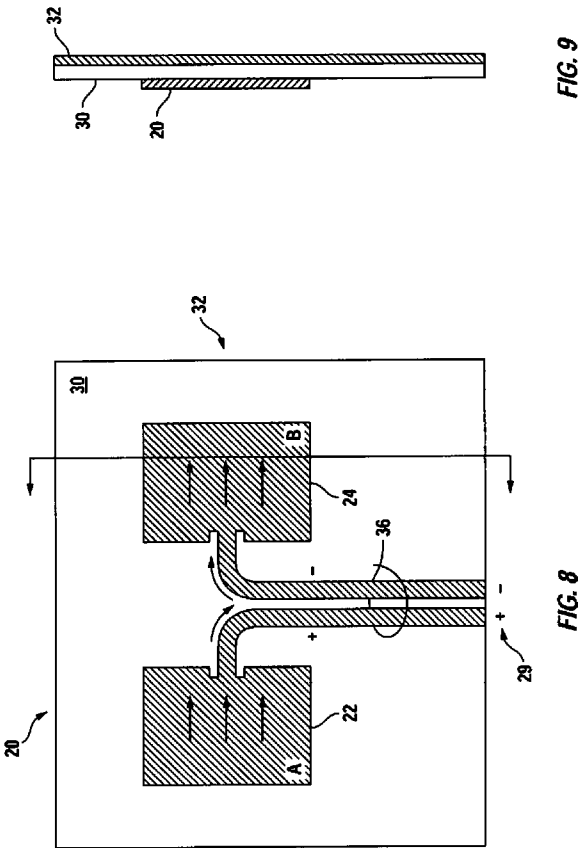
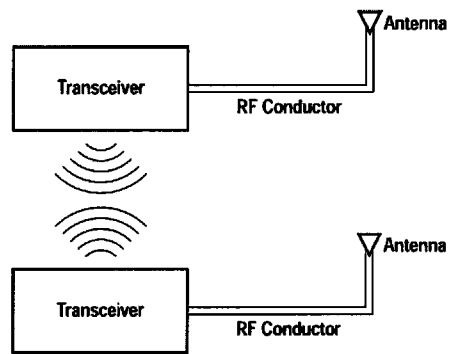


FIG. 7



**FIG. 10**

1

INTEGRATED ANTENNA AND CHIP PACKAGE AND METHOD OF MANUFACTURING THEREOF

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is a continuation of U.S. patent application Ser. No. 12/070,281 filed Feb. 15, 2008, in the name of inventors Michael Gregory Pettus and James Robert Amos Bardeen, entitled "Integrated Antenna And Chip Package And Method Of Manufacturing Thereof", which claims the benefit of priority based on U.S. Provisional Patent Application Ser. No. 60/936,951, filed on Jun. 22, 2007, in the name of inventor Michael G. Pettus, entitled "System And Method For Wireless Communication In A Backplane Fabric Architecture" which are commonly owned herewith.

TECHNICAL FIELD

The subject matter described herein relates generally to an integrated antenna and chip package and a method of manufacturing thereof.

BACKGROUND

Over the years wireless systems have significantly increased in number and applications. Voice and data transmission lead the current usage of wireless devices. New applications are creating more wireless demand, and higher bandwidth requirements are putting pressure on the currently used wireless systems and radio spectrum allocations. Data rates are approaching and will be exceeding the 1 gigabit per second (1 Gb/s) speed point. Gigabit LAN and high definition digital television are examples of applications that will demand very high bandwidth wireless solutions.

By making use of higher frequency radio waves, it becomes practical to create wireless systems with higher operating bandwidths. As an example, the unlicensed wireless LAN spectrum allocated in the U.S. in the 2.4 GHz band extends from 2.4000 to 2.4835 GHz, resulting in an operating maximum bandwidth of 83.5 MHz. The U.S. 60 GHz unlicensed spectrum extends from 57 GHz to 64 GHz, resulting in a maximum bandwidth of 7 GHz (greater than 80 times the bandwidth at 2.4 GHz). Hence the ability to solve greater bandwidth demand is found by exploiting the millimeter wave frequency bands—generally considered those frequencies above 30 GHz.

Designing circuitry for millimeter wave transmitters and receivers requires scaling down the physical size of the electrical interconnect techniques that work fine at the lower frequencies but degrade as the operating frequency increases (and wavelength decreases). The most cost effective technology for integrating transmitter and receiver circuitry is the integrated circuit (IC) based on a semiconductor process. Current semiconductor process technologies have now enabled the ability to create ICs that operate in the millimeter wave regions up through 100 GHz.

Since the physical size of electrical interconnects inside of an IC are extremely small (on the order of 10^{-6} meters, or microns), it is feasible for the IC to operate at frequencies in the 30 to 100 GHz range (with wavelengths on the order of 10^{-3} meters, or millimeters). The problem that immediately presents itself is how to get the millimeter wave energy to and from the IC without appreciable attenuation and loss. The standard method for interconnecting an IC to its outside environment is wire bonding. Small wires are bonded to terminal

2

pads on the IC with the other end of the wires bonded to a pad within the IC package, which in turn are connected to the outside pin on the package typically through a printed circuit trace. The electrical properties of the wire bond, pads and the printed circuit trace (inherent inductance and capacitance) creates appreciable attenuation and unwanted radiation (all adding up to unacceptable losses) at millimeter wave frequencies.

What is needed is a system and method to interconnect a millimeter wave antenna to the integrated circuit without incurring losses through legacy low frequency connections in an efficient and inexpensive integrated antenna and chip package.

OVERVIEW

In an aspect, a chip package comprises a first substrate having a first surface and a second surface, the second surface configured to interface the chip package to a circuit board; a second substrate disposed on the first surface of the first substrate, the second substrate being made of a dielectric material; an antenna disposed on the second substrate; a communication device coupled to the antenna, wherein the communication device is disposed on the second substrate; a lid coupled to the first substrate and configured to encapsulate the antenna and the communication device, the lid having a lens configured to allow radiation from the antenna to be emitted therethrough.

In another aspect, an antenna package lid comprising a thermally conductive body having a top surface, a bottom surface, and four sides disposed between the top and bottom surface, the bottom surface adapted to be mounted to a first substrate; a cavity located within the body and in communication with an opening in the bottom surface, the cavity having a height dimension less than a distance between the top and bottom surfaces, the cavity adapted to fit over an antenna structure coupled to the first substrate, the cavity configured to allow a radiation pattern emitted by the antenna structure to traverse therethrough.

In another aspect, a method for manufacturing an antenna package, the method comprising: selecting a first substrate having a first surface and a second surface; coupling a second substrate onto the first surface of the first substrate, the second substrate being made of a dielectric material, wherein the second substrate is in electrical communication with the first substrate; disposing an antenna on the second substrate; coupling a communication device onto the second substrate, wherein the communication device is electrically coupled to the antenna; attaching a lid to the first substrate to encapsulate the antenna and the communication device therein, the lid having a cavity configured to allow radiation from the antenna to be emitted through the lid.

In one or more of the aspects above, the antenna may be a di-patch or other type of antenna. In an embodiment, the second substrate is comprised of quartz, glass, or other dielectric material. In an embodiment, the lens of the lid is a radiation lens positioned above the antenna, whereby the lid further comprises a shoulder portion configured to be in contact with the communication device, the shoulder portion configured to transfer heat from the communication device. In an embodiment, the package includes a plurality of antennas positioned horizontally or vertically adjacent to one another on the second substrate, wherein at least two antennas are spaced apart a one-half wavelength. It is preferred that the communication device comprises a connecting terminal located between a bottom surface of the communicating

device and the second substrate, wherein the antenna and the connecting terminal is substantially on the same plane.

In an embodiment, the antenna is a full-wave di-patch antenna and includes a common differential feed point having a positive terminal and a negative terminal coupled to the communication device; a differential feed line pair comprising a first feed line having a distal end coupled to the positive terminal and a second feed line having a distal end coupled to the negative terminal, wherein the first and second feed lines are adjacent to one another at the distal end; a first patch antenna connected to a proximal end of the first feed line; a second patch antenna connected to a proximal end of the second feed line, the first patch antenna and the second patch antenna are spaced a full guide wavelength apart, wherein the first and second patch antennas are configured to maximize energy transfer efficiency therebetween to operate as a single full-wave structure. In an embodiment, the current and voltage delivered to the feed points of the first and second patch antennas are 180 degrees out of phase with respect to one another individually and in phase with one another with respect to the antennas. In an embodiment, a sensor is electrically coupled to the communication device, wherein the sensor is configured to monitor heat produced by the communication device.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated into and constitute a part of this specification, illustrate one or more exemplary embodiments of the present invention and, together with the detailed description, serve to explain the principles and exemplary implementations of the invention.

In the drawings:

FIG. 1A illustrates an exploded view of the antenna package in accordance with an embodiment;

FIG. 1B illustrates a perspective view of an antenna array in accordance with an embodiment;

FIG. 1C illustrates a perspective view of a single antenna package in accordance with an embodiment;

FIG. 1D illustrates a perspective view of a single antenna package in accordance with an embodiment;

FIG. 1E illustrates a bottom view of the single antenna package in accordance with an embodiment;

FIG. 2 illustrates a bottom view of a communication device in accordance with an embodiment;

FIG. 3A illustrates a perspective view of a lid for use with the antenna package in accordance with an embodiment;

FIG. 3B illustrates a cross sectional view of the lid in FIG. 3A along line B-B;

FIG. 3C illustrates a side view of a lid with a curved radiation lens in accordance with an embodiment;

FIG. 3D illustrates a side view of a lid with a curved radiation lens in accordance with an embodiment;

FIG. 3E illustrates a perspective view of a lid for use with the antenna package in accordance with an embodiment;

FIG. 3F illustrates a cross sectional view of the lid in FIG. 3E along line F-F;

FIG. 3G illustrates a cross sectional view of an alternative of the lid shown in FIG. 3F;

FIG. 4 illustrates a perspective view of the antenna package with attached lid in accordance with an embodiment;

FIG. 5A illustrates a top view of an antenna package in accordance with an embodiment;

FIG. 5B illustrates a cross sectional view of the package in FIG. 5A along line B-B;

FIG. 5C illustrates a bottom view of the antenna package shown in FIG. 5A;

FIG. 6 illustrates a block diagram of a process of manufacturing and forming the integrated chip and antenna package in accordance with an embodiment;

FIG. 7 illustrates a schematic wiring diagram of a full-wave di-patch antenna according to an embodiment;

FIG. 8 illustrates a diagram of a full-wave di-patch antenna attached to a dielectric substrate and a ground plane according to an embodiment;

FIG. 9 illustrates a cross section view of the schematic of FIG. 8 according to an embodiment; and

FIG. 10 illustrates a block diagram of a system incorporating the full-wave di-patch antenna according to an embodiment.

DESCRIPTION OF EXAMPLE EMBODIMENTS

Various example embodiments are described herein in the context of an integrated antenna chip package. Those of ordinary skill in the art will realize that the following detailed description of the present invention is illustrative only and is not intended to be in any way limiting. Other embodiments of the present invention will readily suggest themselves to such skilled persons having the benefit of this disclosure. Reference will now be made in detail to exemplary implementations of the present invention as illustrated in the accompanying drawings. The same reference indicators will be used throughout the drawings and the following detailed descriptions to refer to the same or like parts.

In the interest of clarity, not all of the routine features of the exemplary implementations described herein are shown and described. It will of course, be appreciated that in the development of any such actual implementation, numerous implementation-specific decisions must be made in order to achieve the specific goals of the developer, such as compliance with application- and business-related constraints, and that these specific goals will vary from one implementation to another and from one developer to another. Moreover, it will be appreciated that such a development effort might be complex and time-consuming, but would nevertheless be a routine undertaking of engineering for those of ordinary skill in the art having the benefit of this disclosure.

In general, the following is directed to an integrated chip and antenna package which is designed to be oriented as a substantially flat package and based on existing inter-connect standards such as land grid array (LGA), ball grid array (BGA) or other known package designs. This allows the antenna package to be amenable to high volume manufacturing techniques using standard surface mount production techniques such as pick-in-place and thermal profile soldering. The package is configured such that no separate mechanical antenna assemblies are required, thereby making the package inexpensive and available to high volume production. Sophisticated beam steering technology is also able to be afforded to the implementation of simple surface mount packages with complete active phase array antenna systems.

In an embodiment, the package is of standard size, such as 19 mm×19 mm with 289 pin, 1 mm pitch, ball standard BGA 17×17 grid. In another embodiment, the package is a 19 mm×19 mm with 324 pin, 1 mm pitch, ball BGA 18×18 grid. In an embodiment, the package is a 10 mm×10 mm with 81 pin, 1 mm pitch, ball standard BGA 9×9 grid. However, the size of the package is dependent on the number of antennas and communication devices which are used in the package; thus other sized packages are contemplated. In an embodiment, the package utilizes 60 GHz millimeter wave antennas and enabled communication devices, although not limited thereto. As described below, an embodiment of the inventive

5

subject matter will be discussed in relation to multiple sets of di-patch antennas, whereby each set is coupled to a respective communication device. In an embodiment, different types of antennas and communication devices may be used in a single package. In an embodiment, it is contemplated that multiple transmitter and/or receiver antennas are used in a single package. As discussed below, an embodiment utilizes a package having a single transmitter and/or receiver antenna along with one or more communication devices.

FIG. 1A illustrates an exploded view of the antenna package design in accordance with an embodiment. As shown in FIG. 1A, the package includes a main substrate **102**, a secondary substrate **104**, and a lid **120**. The main substrate in an embodiment is made of a typical printed circuit board material and has a top surface **102A** as well as a bottom surface **102B**. The main substrate **102** is shown to have a square shape in FIG. 1A although the substrate **102** may have any other desired shape. The bottom surface **102B** is configured to support a BGA (e.g. grid of ball interconnects) to allow the main substrate **102** to be electrically coupled to another circuit board or a motherboard (not shown). The combination of the main substrate **102**, antenna array on the secondary substrate **104** and lid **120** provide for a compact integrated antenna and chip package which has a standardized size and interconnection configuration to allow the package to be used on existing circuit boards without additional tooling or redesign.

In an embodiment, the top surface **102A** of the main substrate **102** shown in FIG. 1A includes a seating portion **103** having a shape configured to receive the secondary substrate **104** thereon. In the embodiment in FIG. 1A, a “H-shaped” secondary substrate **104** is used to attach to the main substrate **102** by an compound although other standard techniques are contemplated to attach the two substrates together. In an embodiment, the second substrate **104** is another shape instead of having the H-shape, whereby the seating portion **103** complements the shape of the second substrate **104** and allows the substrate **104** to be mounted thereto using any appropriate known technology. In an embodiment, the main substrate **102** is made of the same material as the secondary substrate **104**, whereby the package does not require two separate substrates to be mounted on one another.

As shown in FIG. 1A, the secondary substrate **104** includes one or more seating areas **115** each of which is adapted to receive a communication device **108** thereon. In particular, four seating areas form part of the secondary substrate **104** to form the “H-shaped” configuration. Each communication device **108** is electrically coupled to one or more respective antennas **106**, whereby the antenna **106** and the connecting terminals of the communication device **108** are substantially on the same plane. It should be noted that although four communication devices **108** are shown to be used in the chip package in FIG. 1A, any number of communication devices, including only one, can be used in the chip package **100** based on the desired application.

The communication device operates as a radio and provides power to as well as controls the magnitude and phase of radiation emitted from the antenna. The communication device may be configured to operate as a transmitter, receiver or transceiver. In an embodiment, the communication device is a silicon germanium (SiGe) chip although gallium arsenide (GaAs); complimentary metal oxide semiconductor (CMOS); or other semiconductor chips are contemplated. The details of the workings of the communication device are known in the art and are not discussed herein.

In addition to the seating areas **115**, the secondary substrate **104** includes a common area upon which the one or more

6

antennas **106** are located. However it is contemplated that any other shape may be used in manufacturing and using the secondary substrate **104** without departing from the inventive embodiments described herein. In an embodiment, the secondary substrate **104** is made of a dielectric material such as quartz, sapphire, diamond and/or glass to allow the antenna assembly to operate properly. The secondary substrate **104** may be made of any other appropriate low-loss material which allows high radiation efficiencies from the antennas and other components operating in the millimeter wave frequency range.

As shown in FIG. 1A, the antennas **106** are di-patch differential feed antennas which converge together via their feed lines **105** at a common feed point as is described in more detail below. However, it is contemplated that any other type of antenna may be used such as a micro-strip dipole antenna, a regular patch antenna or the like may be used without departing from the inventive embodiments herein.

In an embodiment shown in FIG. 1B, the secondary substrate **104'** includes one or more single feed patch antennas **106'** which are electrically coupled to the communication devices **108**. The single feed patch antenna **106'** is preferably used in applications where the antenna **106'** receives wireless communication signals. As shown in FIG. 1B, each patch antenna **106'** is electrically connected to its respective feed-line **105'** at one end, whereby the feed-line **105'** electrically connected at an opposite end to the communication device **108**. In addition, each antenna **106'** preferably includes a finite ground plane **107'** located on opposing sides of the feed line **105'** to compensate for the unbalanced feed between the communication device **108** and the antenna **106'**. To ensure proper operation of the single patch antenna **106'** over the substrate **104'**, a ground plane **122** is deposited on the bottom surface of the secondary substrate **104'**, opposite of the top surface of the secondary substrate **104'**. FIG. 1E illustrates the bottom surface of the secondary substrate **104'** in accordance with an embodiment, whereby the ground plane **122** is positioned such that it is vertically under the patch antennas **106'** as well as the feed lines **105'**. As shown in FIG. 1E, the ground plane **122** includes a plurality of curved cut outs **124** along the edge of the ground plane **122** on the bottom surface of the substrate **104'**. The curved cut outs **124** are located at areas where the coplanar waveguide structures transition to a micro-strip transmission line on the top surface of the substrate **104'**. In other words, the ground plane **122** is configured such that it does not substantially overlap the co-planar waveguide structure located above it on the other side of the substrate **104'**. The use of ground planes with co-planar waveguide structures in single-patch antenna applications are well known and are not discussed in detail herein.

As stated above, the antenna sets **106'** in FIG. 1B are preferably used in receiver applications whereas the di-patch antennas **106** in FIG. 1A are preferably used in transmitter applications, although not necessarily. It is contemplated that the package **100** may comprise one or more sets of transmitter antennas (FIG. 1A) and/or one or more sets of receiver antennas (FIG. 1B) on the secondary substrate **104**. In an embodiment, the package shown with lid in FIG. 1C comprises a single patch antenna coupled to the communication device. FIG. 1D illustrates another embodiment in which the package includes a single di-patch antenna coupled to the communication device.

The antennas **106** are disposed on the secondary substrate **104** by a metallization process in an embodiment, although any other appropriate techniques or manufacturing process are contemplated. In an embodiment, the antenna and transmission lines are formed onto a substrate by depositing metal

onto the substrate using a thin-film process, whereby various methods of thin film metal deposition may be used. In an embodiment, metal is deposited onto the substrate via chemical vapor deposition, sputtering or plating. In an embodiment, a 3 micrometer layer of gold is deposited over a thin layer of chromium (e.g. 50 nanometers) or titanium on the substrate having a thickness of 250 micrometers to form the patch antennas. Other thicknesses and/or materials may be used and are dependent upon operating frequency and physical packaging constraints for a given application and are not limited to the above values and measurements.

The spacing of an antenna set **106** adjacent to one another on the substrate **104** is designed to create a phased array radiation pattern when activated and controlled by the communication devices **108**. By controlling the phase reference signals to each communication device **108** in the package, the package allows coherent radiated energy produced by the antennas **106** to propagate through a radiation lens in the lid **120** or through the main substrate **102**, as discussed in more detail below. In addition, although the antenna array is shown as having multiple antenna sets adjacent to one another on the substrate plane **104**, two or more sets of antennas may be disposed on top of one another in vertical dimensions along with their respective communication device chips **108** to increase antenna gain and power specifications of the package.

FIG. 2 illustrates a view of the bottom of the communication device **108** in accordance with an embodiment. As shown in FIG. 2, the bottom surface of the communication device **108** includes a series of stud bumps **118** which provide electrical connection between the communication device **108** and the substrate. Of these stud bumps, a plurality of stud bumps **109** are specifically for use with the antenna **106** and are described hereinafter as antenna stud bumps **109**. In particular, the antenna stud bumps **109** allow electrical connection and provide exchange of signals with the antenna **106** disposed on the secondary substrate **104**. In an embodiment, the antenna stud bumps **109** of the communication device **108** are electrically coupled to the common feed points of the antenna **106**.

Referring to FIGS. 1A and 2, each communication device **108** is electrically coupled to its respective antenna **106**, whereby the antenna **106** along with its connection feed points and the antenna stud bumps **109** of the communication device **108** are substantially in the same plane. In particular, the communication devices **108** are electrically coupled to the secondary substrate **104** by a flip chip bonding technique, whereby the stud bumps **118** are directly attached to receiving pads on the seating area **115** of the secondary substrate **104**. By flip chip bonding the communication device **108** to the secondary substrate **104**, the stud bumps **118** (FIG. 2) on the bottom surface of the communication device **108** physically contact the bump pads located on the secondary substrate **104** to establish high frequency and low-loss connections that enable high frequency transmissions with minimal parasitic inductance and capacitance between the communication devices **108** and the secondary substrate **104**. In addition, the flip chip bonding technique ensures that the antenna stud bumps **109** are in physical and electrical connection with the connection feed points of the antenna **106**. This results in high efficiency, low loss transfer of signals between the antenna **106** and the communication device **108**. It should be noted that other appropriate bonding techniques may be used to connect the communication device to the antenna **106** and the main substrate **102**.

As shown in FIG. 1A, the secondary substrate **104** also includes several wire bond pads **110** adjacent to the seating

area **115** which provide electrical connection between the main and secondary substrates **102**, **104**, in an embodiment. The wire bond pads **110** are preferably electrically coupled to the stud bump receiving pads via the secondary substrate **104** using conductive traces. In addition, the wire bond pads **110** on the secondary substrate **104** are wire bonded **117** to corresponding pads **112** disposed on the main substrate **102**. The wire bonds **117** allow low frequency signals to pass between the communication device **108** and the main substrate **102**, as opposed to the high frequency signals between the antenna **106** and communication device **108**. It should be noted that other interconnect technologies besides wire bonding, including flip chip, may be used between the secondary and the main substrates to provide connection therebetween.

FIG. 3A illustrates a perspective view of the lid which is used in the antenna package in accordance with an embodiment. In particular for FIG. 3A, the lid **200** is shown upside down to illustrate the interior of the lid **120**. The lid **200** includes a top surface **202**, a bottom surface **204** and four sides positioned between the top and bottom surfaces. The bottom surface **204** is configured to be in contact with the main substrate **102** when the lid **200** is mounted to the main substrate **102** as shown in FIG. 4, whereby the lid **200** encapsulates the antenna(s), substrate(s), and the communication device(s).

In an embodiment, the lid **200** shown in FIG. 3A has a two tiered cutout therein, thereby forming a shoulder area **206** and a radiation lens area **210**. The shoulder area **206** is located proximal to the bottom **204** and is recessed a distance **D1** from the bottom surface **204** as shown in FIGS. 3A and 3B. In addition, the radiation lens area **210** is proximal to the top surface **202** of the lid **200** and is located a distance **D2** from the top surface **202** of the lid as shown in FIG. 3B. The distance **D2** and thus the thickness of the radiation lens **210** is dependent on the material and dielectric properties of the lid **200** as well as the guide wavelength ($\lambda_g/2$) of the operating frequency of the device.

In an embodiment, the lid **200** is made of aluminum nitride although other low-loss and thermally conductive materials are contemplated. For instance, the lids described herein may be made of high density carbon (e.g. diamond), ceramics, and/or thermoplastic. In the embodiment in which the lid **200** is made of aluminum nitride, the depth **D2** is optimized to be approximately one-half of the guide wavelength ($\lambda_g/2$). This causes the radiation lens **210** to be effectively transparent with respect to the radiation generated from the antennas **106** to allow maximum energy to be transmitted through the lens **210**.

The shoulder area **206** has the height **D1** to allow it to be within a predetermined distance from the predetermined contact areas **108A** of the communication devices **108** without physically touching the contact areas **108A** when the lid **200** is coupled to the main substrate **102** as shown in FIG. 4. In an embodiment, the thermal contact areas **108A** of the communication devices **108** have a coating of a thermal compound **116** or other thermally compliant material applied thereon. The compound **116** is thus positioned between the shoulder **206** and the top surface **108A** of the communication device **108** when the lid **200** is coupled to the main substrate **102**. The thermal compound **116** is thermally conductive and compliant to allow for differential thermal expansion and contraction between all components within the package. The thermal conductivity of the thermal compound **116** allows heat generated from the communication device **108** to be conducted from the communication device **108** to the lid **200** via the compound **116**.

In an embodiment, the package **100** includes one or more sensors **113** (FIG. 1B) which are preferably disposed on the secondary substrate **104** and electrically connected to the main substrate **102**. The sensors **113** may be used to monitor heat produced by the communication devices **108**. In addition, the sensors **113** may be used with another control circuit or the communication device **108** itself to measure operational characteristics of the communication device **108**. In particular, a software program coupled to the package may closely monitor the temperature of the communication devices **108** to provide a feedback system. In particular, the feedback system is capable of automatically adjusting the frequency, frequency stability, gain, sweeping and/or other parameters to account for digital monitoring and compensation of parameters upon which the communication device operates in response to the temperature measured in one or more areas of the communication devices **108**. In another embodiment, the feedback system is configured so that a user can manually monitor and compensate the system in response to the measured temperature. In an embodiment, a transistor is used as the sensor **113**, although any type of sensor may be used. It should be noted that although four sensors **113** are shown (one per communication device), any number of sensors, including only one, may be used in an embodiment. It is contemplated that the sensor **113** may be utilized in any of the embodiments described herein although only shown in the embodiment in FIG. 1B.

Referring back to the embodiment in FIG. 3A, the radiation lens **210** has a circular contour shape **208** and a surface which is substantially planar and parallel to the top surface **202**. In an embodiment, the radiation lens **210** is located in the center of the lid and is symmetrical to allow the radiation lens **210** to be positioned over the antennas **106** when the lid **200** is coupled to the main substrate **102**, as shown in FIG. 4. As shown in FIGS. 1C and 1D, the lens may be asymmetrical with respect to the lid. The location of the radiation lens **210** allows radiation generated from the antennas **106** to radiate orthogonally with respect to the secondary substrate through the radiation lens **210** with minimal interference and optimal gain. As stated above, the shape and thickness of the radiation lens **210** along with the material of the lid **200** serves to provide optimum conditions for radiation to be emitted from the antennas **106** while allowing a maximum amount of heat to transfer and dissipate from the communication devices **108** to the lid **200**.

Although the embodiment in FIGS. 3A and 3B illustrates the radiation lens **210** to be substantially flat and parallel to the top surface, it is contemplated that the radiation lens may have a semi-circular, elliptical or other curved design as shown in FIG. 3C. The curved radiation lens **216** shown in FIG. 3C controls the radiation patterns and may produce different radiation patterns due to refraction and diffraction of the energy beams transmitted by the antennas. It should be noted that other designs for the radiation lens are contemplated and are not limited to the designs described herein. For example, as shown in FIG. 3D, the radiation lens **210'** is substantially flat and parallel to the top surface of the lid **202**. However, the lens **210'** has curved sides **216'** which may be used to produce a different radiation pattern than the radiation pattern for the lid in FIG. 3B due to refraction and diffraction of the energy beams from the antennas.

FIGS. 3E and 3F illustrate another embodiment of the lid. As shown in FIG. 3F, the lid **250** includes a radiation lens **254** which positions over the communication device **108** as well as the antenna array **106**. In the embodiment shown in FIGS. 3E and 3F, the shoulder portion **252** comprises a thermally conductive insert **252** that is made of a material different than the lid **250** itself. The shoulder insert **252** is positioned within

the radiation lens **254** and has a thickness such that it comes within a predetermined distance with the top surface of the communication device **108**. As stated above with respect to the other lid embodiments, the shoulder does not come into direct contact with the communication device, but instead contacts a thermal compound which is placed between the communication device **108** and the insert **252**. As with the other embodiments, the thermal compound in FIG. 3E allows heat produced from the communication device to conduct therethrough and onto the shoulder insert **252** to be released through the lid **250**. In the embodiments in FIG. 3E-3G, the shoulder insert **252** includes a tongue portion **252A** which covers the entire top surface of the communication device **108** to allow heat from the communication device **108** to conduct to the shoulder insert **252**. The shoulder insert **252** in FIG. 3E has a stepped configuration whereby the tongue portion **252A** has a smaller thickness dimension compared to the remaining portion of the insert **252**. However, it is contemplated that the tongue portion and the remaining portion (both designated as **252** in FIG. 3G) have the same overall thickness dimension. It is contemplated that lid **250** is made of thermally conductive material with low-loss characteristics including, but not limited to, aluminum nitride, thermoplastics (e.g. Polyphenylene Sulfide), high density carbon (e.g. diamond), and/or ceramics. The shoulder insert **252** is preferably made of copper, although other thermally conductive materials are contemplated.

Although the above embodiments describe the radiation lens being in the lid above the antenna array, the radiation lens may additionally or alternatively be located below the antennas and in the main substrate. FIG. 5A illustrates a top view of a package in which the radiation lens is below the antenna array section. FIG. 5B shows a side view of the same package in accordance with an embodiment. As shown in FIG. 5A the main substrate **302** includes the secondary substrate thereon **304** whereby one or more sets of antennas **306** are disposed on the secondary substrate **304**. Again, it should be noted that the embodiment in FIGS. 5A-5C is not limited to di-patch antennas as shown, but can include any other type of antenna. The communication devices **308** are coupled to the antennas **306** to power the antennas **306** as described above. As shown in FIGS. 5B and 5C the main substrate **302** includes one or more radiation lenses **310** positioned between the main substrate **302** and the ball grid array **312**. As shown in FIG. 5C, the lens **310** is able to be seen from the bottom of the substrate **302**. Alternatively, the radiation lens **310** may be incorporated into the main substrate **302** and/or the secondary substrate **304**. In an embodiment, substrate **314** or other dielectric substrate is positioned above the antennas **306** and communication devices **308**, whereby the substrate **314** serves as a lid to allow the radiation from the antennas to traverse through. In an embodiment, the lid described above in FIGS. 3A and 3B may be used instead of substrate **314**. It should be noted that the designs shown herein are part of an embodiment and other designs are contemplated which fulfill the same or similar functions.

The multiple die transmitters or receivers may be used on one die pad as well as on one main substrate. In an embodiment the package in the main substrate may have secondary substrates **104** on either or both sides whereby instead of a ball grid array being on the opposite surface of the antenna assembly, there is a shared radiating surface between substrates.

FIG. 6 illustrates a manufacturing process in accordance with an embodiment. It should be noted, however, that the steps discussed herein do not necessarily need to be performed in the particular order described herein. In addition, it

11

should be noted that additional and/or alternative steps which are standard and known in the art, maybe used to manufacture the package described herein.

As shown in FIG. 6, one or more antennas are formed on the secondary substrate in block 400. In addition, the secondary substrate is formed using appropriate known technologies to include all necessary bond pads to allow power and control signals to pass between the antennas, communication devices, main substrate and all other circuit boards which are electrically coupled to the package. The secondary substrate may be formed to have an H shape as shown in the Figures, although other shapes are contemplated. As stated above, the antennas may be metallized, etched or formed using any other appropriate technology onto the secondary substrate. In block 402, the communication device is selected and stud bumps are applied to the bottom surface using appropriate known technologies. In particular, the interconnects are thermally bonded via gold stud bumps to the bottom surface of the communication device. In block 404, the communication device is flip chip attached to the secondary substrate. In attaching the communication devices to the secondary substrate, the communication devices are aligned to ensure a solid electrical connection between the antenna stud bumps and the feed lines of the antenna in the secondary substrate. At this point, the antenna assembly has been formed.

In an embodiment, although not necessary, one or more sensors are attached to the secondary substrate at a designated bond pad directly to the main substrate, as shown in block 406. In an embodiment, underfill is applied between the bottom surface of the communication device and the top surface of the secondary substrate to secure the communication device thereto.

Upon the antenna assembly being formed, the remaining portion of the package is manufactured. In block 408, the secondary substrate is attached to the main substrate using appropriate known technologies. In addition, all electrical connections between the main substrate and the secondary substrate are established by wire bonding, flip chip bonding or other interconnect bonding technologies (block 410). In an embodiment, the main substrate and the secondary substrate are integrally formed as one piece whereby individual substrates do not need to be attached to one another in manufacturing the chip package.

Thereafter, thermal compound is preferably applied to the top surface of the communication devices which will interface and come into contact with the shoulder portion of the lid (block 412). The lid is then attached to the main substrate using appropriate known technologies to form the majority of the package, as in block 414. Grid array interconnects, such as a BGA or LGA are applied to the bottom surface of the main substrate (block 416) to form the package, whereby the package is then able to be attached to a circuit board.

As discussed above, in an embodiment, the package includes one or more di-patch antennas disposed on the secondary substrate. Information regarding the di-patch antenna will now be discussed. FIG. 7 illustrates a schematic diagram of a full-wave di-patch antenna according to an embodiment. The efficient antenna operable at millimeter wave frequencies is created on a planar low-loss surface using microstrip techniques. The material for the low-loss surface is comprised of a low-loss dielectric, such as quartz. The antenna and transmission lines is comprised of metal (such as gold or copper) that can be deposited onto the dielectric surface. On the same dielectric surface the transmitter and/or receiver IC can be mounted with the interconnection to the transmission line(s) made through a very small metallic connection (known as a

12

metal bump), with the IC actually facing down (pads facing the deposited metal pads and traces on the dielectric) in a "flipped" position.

In an embodiment, the di-patch antenna 20 shown includes a first patch antenna 22 and a second patch antenna 24. The first and second patch antennas 22, 24 are each coupled to respective feed lines 26, 28. The patch antennas 22, 24 are shown to have a rectangular shape with dimensions (L×W), although the antennas 22, 24 may have any other appropriate shape.

In the case of the rectangular patch shape, the length (L) dimension of the antenna is a critical dimension in which the length dimension L is one-half of the guide wavelength, λ_g in an embodiment. The guide wavelength λ_g is a half wave length when taking into consideration the dielectric properties of the substrate 32 upon which the patch antenna 20 is disposed as well as other electromagnetic modes that may occur within the dielectric substrate. The λ_g is affected by the relative permittivity (ϵ_r) and the thickness of the substrate, and the size of the substrate and groundplane relative to λ . It is analytically difficult to predict the exact value of L for a particular structure, but very good results are achieved by use of electromagnetic modeling programs. The width (W) dimension is less critical than the length dimension and can be a fraction or multiple of the L dimension. In an embodiment, the patch antennas 22, 24 are square-shaped, whereby the W dimension is equal to length ($\lambda_g/2$). In an embodiment, as shown in FIG. 7, the patch antennas 22, 24 have a rectangular shape wherein the W dimension is one and a half times the length dimension L. The spacing between the two patch antennas 22, 24, center-to-center as shown in FIG. 7, is twice the length dimension (2L) of the individual patch antennas in an embodiment.

As shown in FIG. 7, two differential or balanced feed lines 26, 28 are coupled to the patch antennas 22, 24. In addition, the first feed line 26 is also coupled to a positive terminal of a differential feed point 29 at a distal end, whereas the second feed line 28 is coupled to a negative terminal of the differential feed point 29 at a distal end. It should be noted that the positive-negative terminals at 29 may be reversed in an embodiment. The feed lines 26, 28 are coupled to the inset feeds 27 at a proximal end, whereby the lines 26, 28 gradually curve at an angle (26A, 28A). The proximal ends of the feed lines 26, 28 are connected to the patch antennas at a center point with respect to the W dimension and are thus rotated ninety degrees relative to the parallel portions 26B, 28B. In an embodiment shown in FIGS. 7 and 8, following the angles at 26A, 28A, the feed lines 26, 28 then become parallel with one another toward their distal ends 26B, 28B. It should be noted that other shapes of the feed lines are contemplated and are not limited to the embodiments only discussed herein.

As shown in FIG. 7, the patch antennas 22, 24 face away from one another and are positioned ninety degrees from and adjacent to the distal portion of the differential feed lines 26B, 28B. In particular, as shown in FIG. 7, the patch antenna 22 is positioned -90° with respect to the distal portion 26B of the differential feed line 26 whereas the patch antenna 24 is positioned $+90^\circ$ with respect to the distal portion 26B of the differential transmission line 28B. In addition, the inset feeds 27 of each antenna 22, 24 are positioned to face one another and are at a closest distance with respect to one another. In contrast, the top edges opposite to the inset feed edges of the antennas 22, 24 are a farthest distance from one another.

The two differential feed lines 26, 28 form a balanced transmission line in which the phase of the current and voltage is inverted 180 degrees between the left and right patch antennas 22, 24 in order to produce in-phase currents and

13

voltages in the left and right patch elements. In other words, the currents in the transmission lines feeding the right and left patch antennas 22, 24 are 180 degrees out of phase with respect to one another, as shown in FIG. 8. However, the currents in the right and left patch antennas 22, 24 are in phase with one another collectively when both antennas 22, 24 are viewed with respect to an external reference. The design incorporates half-wave patch antenna structures in which there is a half-wave gap or $\lambda_g/2$ between the edges 30, 32 of the respective patch antennas 22, 24. This results in a full-wave λ_g spacing between the centers of the patch antennas 22, 24 as described above. The radiation pattern phase center is located at the center point between the patch structures as illustrated. By use of the antenna structure shown, the need for a matching balun is eliminated. As a result, maximum energy transfer efficiency is attained. Further, the full-wave di-patch antenna 20 has higher directive gain than a half-wave microstrip patch antenna.

FIG. 8 illustrates a diagram of an assembly of the full-wave di-patch antenna 20 disposed on a dielectric substrate 30 in accordance with an embodiment. FIG. 9 is a cross section view, along the line shown in FIG. 3, of the antenna assembly in FIG. 8. These drawings are not to scale and are only intended to show a general design of the various layers. A wide variety of actual implementations may be possible within the scope of the present invention. Those of ordinary skill in the art will recognize that the dielectric substrate 30 will likely be much thinner than shown. The dielectric substrate 30 is made of a low-loss material such as PTFE based composites, a silicon dioxide (SiO_2), quartz, fused silica, ceramic materials, or the like.

As shown in FIG. 8, the angled configuration of the first and second patch antennas 22, 24 allow the currents flowing through both patch antennas 22, 24 to be in phase with one another, as shown by the arrows. In particular to FIG. 8, the current in the first patch antenna 22 flows from left to right, through the feed line 26 to the positive terminal of the feed point, as shown by the arrows. In addition, as shown in FIG. 8, the current travels from the negative terminal at the feed point upward and into the feed line inset in the second patch antenna 24, whereby the current flowing in the patch antenna 24 also travels left to right, as shown by the arrows. This configuration thus results in a single full-wave antenna structure composed of two elements with higher gain than a single patch antenna (approximately 9 dBi for the full-wave antenna compared to 7 dBi of a half wave antenna). In addition, this configuration provides maximum efficiency of the energy transfer to the full-wave antenna 22, 24 without requiring the use of a matching balun.

The antenna configurations described herein employ one or more full wave di-patch antennas, whereby the antenna configurations may be used in several applications. One example application may include millimeter wave transmitters, receivers, or transceivers using a balanced line feed (FIG. 4). Another example application may be a radar transceiver such as those used for vehicular collision avoidance (e.g. 77 GHz) as well as radio frequency identification (RFID), tracking and security systems (e.g. 60 GHz, 92 GHz and/or 120 GHz). Another example may include a passive millimeter wave detection system such as those that may be employed in airport security systems, industrial object tracking, through-the-wall detection systems (24 GHz, 60 GHz, and/or 92 GHz) and the like. A fourth example may be high speed digital communication systems for data links, wireless “no cable” links, high-definition video transport, and/or wireless local area networks using millimeter wave frequencies (60 GHz, 92 GHz, and/or 120 GHz). Those of ordinary skill

14

in the art having the benefit of this disclosure will realize other applications may exist which can utilize the antenna configurations described herein. These configurations are scalable to frequencies up through millimeter and sub-millimeter ranges, including (but not limited to) the “sub terahertz” frequencies from 300 GHz through 1 THz.

Although the antenna configurations are shown and described herein as having two antennas, it is contemplated that more than two antennas may be coupled to a pair of differential feed lines in an embodiment. It is also contemplated that multiple sets of patch antennas may be disposed on a substrate to increase the amount of gain produced and to provide phased array beam steering functionality by controlling the phases of the voltages and currents connected to the feed lines associated with each set of antenna elements.

In operating the package embodiments described above, the package having one or more transmitters, receivers, and/or transceivers within is mounted on a printed circuit board for use with a portable or non-portable electronic device. A power source provides the necessary voltage, current and power to the package via the printed circuit board to operate the communication device as well as the antenna(s) within the package. Logic and/or circuitry is coupled to the package via the printed circuit board to allow operation of the package. During operation, wireless signals carrying information are transmitted at a predetermined frequency, phase and gain from a package having at least one transmitter antenna. The wireless signals are received by another package having at least one receiver antenna. In an embodiment, a processor coupled to the communication device processes the received information. However it is contemplated that the communication device itself may be configured to process the received information.

In an embodiment, a software program running on a computer, processor, ASIC or other module is coupled to one or more printed circuit boards via standard interface bus (e.g. USB), whereby a user may operate one or more packages using the software program and adjust one or more variables including, but not limited to: baseband attenuation, gain, modulation schemes (e.g. FM, AM, QAM), frequency at which the communication device can operate. The range of voltages to operate the package are between and including 1 to 10 volts. The range of current to operate the package is between and including 10-300 mA. The range of power to operate the package is between and including 10-600 mW. It should be noted that these range values are exemplary and it is contemplated that other values for voltage, current and power may be used to operate the package.

While embodiments and applications have been shown and described, it would be apparent to those skilled in the art having the benefit of this disclosure that many more modifications than mentioned above are possible without departing from the inventive concepts disclosed herein. The invention, therefore, is not to be restricted except in the spirit of the appended claims.

What is claimed is:

1. An integrated antenna and chip package comprising:
 - a first substrate having a first surface and a second surface, the second surface configured to interface the chip package to a circuit board being made of a first dielectric material;
 - a second substrate disposed on the first surface of the first substrate, the second substrate being made of a second dielectric material;
 - a communication device disposed on the second substrate;

15

an antenna disposed on the second substrate and coupled to the communication device, the antenna further comprising:

a common differential feed point having a positive terminal and a negative terminal coupled to corresponding terminals of the communication device;

a differential feed line pair comprising a first feed line having a distal end coupled to the positive terminal and a second feed line having a distal end coupled to the negative terminal, wherein the first and second feed lines are adjacent to one another at the distal end;

a first patch antenna connected to a proximal end of the first feed line; and

a second patch antenna connected to a proximal end of the second feed line, the first patch antenna and the second patch antenna are spaced a full guide wavelength apart, wherein the first and second patch antennas are configured to maximize energy transfer efficiency therebetween to operate as a single full-wave structure at millimeter wave frequencies; and

a lid coupled to the first substrate and configured to encapsulate the antenna and the communication device, the lid having a lens configured to allow radiation from the antenna to be emitted therethrough.

2. The package of claim 1, wherein the second substrate is comprised of quartz.

3. The package of claim 1, wherein the lens is a radiation lens positioned above the antenna, the lid further comprises a shoulder portion configured to be in thermal contact with the communication device, the shoulder portion configured to transfer heat from the communication device.

4. The package of claim 3, wherein the shoulder portion is made of copper.

5. The package of claim 1, wherein the antenna further comprises a plurality of antennas positioned horizontally adjacent to one another on the second substrate, wherein at least two antennas are spaced apart a one-half wavelength.

6. The package of claim 1, wherein the communication device comprises a connecting terminal located between a bottom surface of the communicating device and the second substrate, wherein the antenna and the connecting terminal are substantially on the same plane.

7. The package of claim 1, wherein the current and voltage delivered to the feed points of the first and second patch antennas are 180 degrees out of phase with respect to one another individually and in phase with one another with respect to the antennas.

8. The package of claim 1, further comprising a sensor electrically coupled to the first substrate and positioned adjacent to the communication device, the sensor configured to measure a temperature of the communication device.

9. A method for manufacturing an antenna package, the method comprising:

selecting a first substrate having a first surface and a second surface;

coupling a second substrate onto the first surface of the first substrate, the second substrate being made of a dielectric material, wherein the second substrate is in electrical communication with the first substrate;

disposing an antenna on the second substrate;

disposing a communication device onto the second substrate, wherein the communication device is electrically coupled to the antenna, the antenna further comprising:

a common differential feed point having a positive terminal and a negative terminal coupled to corresponding terminals of the communication device;

16

a differential feed line pair comprising a first feed line having a distal end coupled to the positive terminal and a second feed line having a distal end coupled to the negative terminal, wherein the first and second feed lines are adjacent to one another at the distal end;

a first patch antenna connected to a proximal end of the first feed line;

a second patch antenna connected to a proximal end of the second feed line, the first patch antenna and the second patch antenna are spaced a full guide wavelength apart, wherein the first and second patch antennas are configured to maximize energy transfer efficiency therebetween to operate as a single full-wave structure at millimeter wave frequencies; and

attaching a lid to the first substrate to encapsulate the antenna and the communication device therein, the lid having a cavity configured to allow radiation from the antenna to be emitted through the lid.

10. The method of claim 9, wherein the antenna is a full wave di-patch antenna.

11. The method of claim 9, further comprising coupling a sensor to the communication device, wherein the sensor is configured to measure a temperature of the communication device.

12. The method of claim 9, wherein the antenna is disposed such that the antenna is in a substantially same plane as a connecting terminal located on a bottom surface of the communicating device.

13. The method of claim 9, wherein the lid comprises a shoulder portion configured to be in thermal contact with the communication device, the shoulder portion configured to transfer heat from the communication device.

14. The method of claim 9, wherein the shoulder portion is made of copper.

15. An integrated antenna and chip package comprising:

a first substrate having a first surface and a second surface, the second surface configured to interface the integrated antenna and chip package to a circuit board being made of a first dielectric material;

a second substrate disposed on the first surface of the first substrate, the second substrate being made of a second dielectric material;

a communication device disposed on the second substrate; an antenna disposed on the second substrate, the antenna further comprising:

a common differential feed point having a positive terminal and a negative terminal coupled to corresponding terminals of the communication device;

a differential feed line pair comprising a first feed line having a distal end coupled to the positive terminal and a second feed line having a distal end coupled to the negative terminal, wherein the first and second feed lines are adjacent to one another at the distal end;

a first patch antenna connected to a proximal end of the first feed line;

a second patch antenna connected to a proximal end of the second feed line, the first patch antenna and the second patch antenna are spaced a full guide wavelength apart, wherein the first and second patch antennas are configured to maximize energy transfer efficiency therebetween to operate as a single full-wave structure at millimeter wave frequencies.

* * * * *